

# AXIS Q1686-DLE Radar-Video Fusion Camera

## One device to identify high-speed vehicles

This powerful device monitors vehicle speeds up to 200 km/h (125 mph), 24/7. It can be combined with license plate recognition software to link the vehicle's speed to the license plate with processing on the edge or the server. Plus, it can detect wrong-way driving and link it to a license plate. With multiple line-crossing scenario, the same object must cross two virtual lines to trigger an alarm, making the notifications more reliable. Based on an open platform, it's compatible with various systems. It can trigger other devices such as digital signs. Furthermore, it's easy to install and set up, and it's factory-calibrated.

- > **Two powerful technologies in one device**
- > **Connect vehicle speed to a license plate**
- > **Monitor vehicle speeds up to 200 km/h (125 mph)**
- > **Detect and identify wrong way driving**
- > **Axis Edge Vault safeguards the device**



# AXIS Q1686-DLE Radar-Video Fusion Camera

<b>Camera</b>	
<b>Image sensor</b>	1/1.8" progressive scan RGB CMOS Pixel size 2.9 µm
<b>Lens</b>	Varifocal, 9–50 mm, F1.5 Horizontal field of view: 46°–9° Vertical field of view: 26°–5° Minimum focus distance: 3 m (9.8 ft) Autofocus, i-CS lens, IR corrected, remote zoom and focus, P-Iris control
<b>Day and night</b>	Automatic IR-cut filter Hybrid IR filter
<b>Minimum illumination</b>	4 MP 25/30 fps with Forensic WDR and Lightfinder 2.0 Color: 0.05 lux at 50 IRE, F1.5 B/W: 0.01 lux at 50 IRE, F1.5 4 MP 50/60 fps with Lightfinder 2.0 Color: 0.1 lux at 50 IRE, F1.5 B/W: 0.02 lux at 50 IRE, F1.5 0 lux with IR illumination on
<b>Shutter speed</b>	1/47500 s to 1 s
<b>License Plate Capture</b>	
<b>Detection range</b>	Up to 50 m (164 ft)
<b>IR illumination</b>	OptimizedIR with power-efficient, long-life 850 nm IR LED's with adjustable angle of illumination and intensity. Range of reach 50 m (164 ft) or more depending on the scene.
<b>Installation</b>	Mounting height: Up to 12 m (39 ft) Distance from road: Up to 10 m (33 ft) Camera detects tilt and roll angle automatically Built-in traffic camera installation assistant optimizes video settings based on mounting height, distance to vehicle, and expected vehicle speed
<b>Radar</b>	
<b>Profiles</b>	Area monitoring Road monitoring
<b>Sensor</b>	FMCW (Frequency Modulated Continuous Wave)
<b>Object data</b>	Object type (classes: humans, vehicles, unknown), range, direction, velocity
<b>Frequency</b>	Channel 1: 61.00–61.25 GHz Channel 2: 61.25–61.50 GHz
<b>RF transmit power</b>	<100 mW (EIRP) License free. Unharmful radio-waves.
<b>Recommended mounting height</b>	3.5–12 m (11–39 ft) <sup>a</sup>
<b>Recommended mounting tilt</b>	Up to 18° <sup>b</sup>
<b>Detection range</b>	Area monitoring profile: 5–60 m (16–200 ft) when detecting a person <sup>c</sup> 5–90 m (16–300 ft) when detecting a vehicle <sup>c</sup> Road monitoring profile: Up to 150 m (492 ft) when detecting a vehicle <sup>d</sup>
<b>Radial speed</b>	Area monitoring profile: Up to 55 km/h (34 mph) Road monitoring profile: Up to 200 km/h (125 mph)
<b>Field of detection</b>	Horizontal: 95°
<b>Speed accuracy</b>	+/- 2 km/h (1.25 mph)
<b>Distance accuracy</b>	Area monitoring profile: 0.5 m (1.6 ft) Road monitoring profile: 0.8 m (2.6 ft)
<b>Angle accuracy</b>	1°
<b>Spatial differentiation</b>	3 m <sup>e</sup>
<b>Data refresh rate</b>	10 Hz
<b>Coverage</b>	Area monitoring profile: 2700 m <sup>2</sup> (29000 sq ft) for persons 6100 m <sup>2</sup> (65600 sq ft) for vehicles Road monitoring profile: See the product's user manual at <a href="http://axis.com">axis.com</a> <sup>f</sup>
<b>Coexistence zone</b>	Frequency band: 60 GHz Radius: 350 m (1148 ft) Recommended number of radars: up to 8
<b>Radar controls</b>	Multiple detection zones, line crossing detection with one or two lines, exclude zones with filters for short-lived objects, object speed, and object type, configurable trigger duration Radar transmission on/off, reference map, grid opacity, zone opacity, color scheme, trail lifetime, detection sensitivity, swaying object filter, small object filter, frequency channel
<b>System on chip (SoC)</b>	
<b>Model</b>	ARTPEC-8
<b>Memory</b>	2048 MB RAM, 8192 MB Flash
<b>Compute capabilities</b>	Deep learning processing unit (DLPU)
<b>Video</b>	
<b>Video compression</b>	H.264 (MPEG-4 Part 10/AVC) Baseline, Main and High Profiles H.265 (MPEG-H Part 2/HEVC) Main Profile Motion JPEG
<b>Resolution</b>	16:9: 2688x1512 to 160x90 16:10: 1280x800 to 160x100 4:3: 2016x1512 to 160x120
<b>Frame rate</b>	WDR: Up to 25/30 fps (50/60 Hz) in all resolutions No WDR: Up to 50/60 fps (50/60 Hz) in all resolutions
<b>Video streaming</b>	Up to 20 unique and configurable video streams <sup>9</sup> Axis Zipstream technology in H.264 and H.265 Controllable frame rate and bandwidth VBR/ABR/MBR H.264/H.265 Low latency mode Video streaming indicator
<b>Signal-to-noise ratio</b>	>55 dB
<b>WDR</b>	Forensic WDR: Up to 120 dB depending on scene
<b>Noise reduction</b>	Spatial filter (2D noise reduction) Temporal filter (3D noise reduction)
<b>Image settings</b>	Saturation, contrast, brightness, sharpness, white balance, day/night threshold, local contrast, tone mapping, exposure mode, exposure zones, defogging, compression, dynamic text and image overlay, polygon privacy mask, target aperture Scene profiles: forensic, vivid, traffic overview, license plate
<b>Image processing</b>	Axis Zipstream, Forensic WDR, Lightfinder 2.0, OptimizedIR
<b>Audio</b>	
<b>Audio features</b>	Automatic gain control Speaker pairing
<b>Audio streaming</b>	Two-way (full duplex) Noise reduction
<b>Audio input</b>	10-band graphic equalizer Input for external balanced or unbalanced microphone, optional 5 V microphone power Digital input, optional 12 V ring power Balanced or unbalanced line input Input through speaker pairing
<b>Audio output</b>	Line output Output through speaker pairing
<b>Audio encoding</b>	24bit LPCM, AAC-LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Opus 8/16/48 kHz Configurable bitrate
<b>Network</b>	
<b>Network protocols</b>	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPS <sup>h</sup> , HTTP/2, TLS <sup>h</sup> , QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP <sup>g</sup> , SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCPv4/v6, ARP, SSH, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf), IEEE 802.1X (EAP-TLS), IEEE 802.1AR
<b>System integration</b>	
<b>Application Programming Interface</b>	Open API for software integration, including VAPIX <sup>®</sup> , metadata and AXIS Camera Application Platform (ACAP); specifications at <a href="http://axis.com/developer-community">axis.com/developer-community</a> . ACAP includes Native SDK and Computer Vision SDK. One-click cloud connection

	ONVIF® Profile G, ONVIF® Profile M, ONVIF® Profile S, and ONVIF® Profile T, specifications at <a href="http://onvif.org">onvif.org</a>
<b>Video management systems</b>	Compatible with AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at <a href="http://axis.com/vms">axis.com/vms</a>
<b>Onscreen controls</b>	Privacy masks Radar picture-in-picture Augmented overlay (radar) Media clip
<b>Edge-to-edge</b>	Speaker pairing PTZ camera pairing
<b>Event conditions</b>	Application Audio: audio clip playing Device status: above/below/within operating temperature, casing open, IP address blocked, IP address removed, new IP address, live stream active, network lost, radar data failure, ring power overcurrent protection, system ready Digital audio input status Edge storage: recording ongoing, storage disruption, storage health issues detected I/O: digital input, manual trigger, virtual input MQTT: subscribe Radar motion Scheduled and recurring: schedule Video: average bitrate degradation, day-night mode, tampering
<b>Event actions</b>	Audio clips: play, stop Day-night mode Defog mode I/O: toggle I/O once, toggle I/O while the rule is active LEDs: flash status LED MQTT: publish Notifications: HTTP, HTTPS, TCP and email Overlay text Radar: radar autotracking, radar detection Recordings: SD card and network share SNMP traps: send, send while the rule is active Upload of images or video clips: FTP, SFTP, HTTP, HTTPS, network share and email WDR mode
<b>Built-in installation aids</b>	Traffic camera installation assistant, pixel counter, remote zoom and focus, level grid, leveling assistant
<b>Analytics</b>	
<b>Applications</b>	<b>Included</b> AXIS Object Analytics, AXIS Scene Metadata, AXIS Video Motion Detection, AXIS Speed Monitor <sup>l</sup> , AXIS Radar Integration for Microbus <sup>l</sup> , active tampering alarm, audio detection, orientation aid <b>Supported</b> AXIS License Plate Verifier, Support for AXIS Camera Application Platform enabling installation of third-party applications, see <a href="http://axis.com/acap">axis.com/acap</a>
<b>AXIS Object Analytics</b>	<b>Object classes:</b> humans, vehicles (types: cars, buses, trucks, bikes, other) <b>Scenarios:</b> line crossing, object in area, time in area, crossline counting, occupancy in area Up to 10 scenarios <b>Key features:</b> detection sensitivity, object speed <b>Other features:</b> triggered objects visualized with trajectories, color-coded bounding boxes and tables Polygon include/exclude areas Perspective configuration ONVIF Motion Alarm event
<b>AXIS Scene Metadata</b>	<b>Object classes:</b> humans, faces, vehicles (types: cars, buses, trucks, bikes), license plates <b>Object attributes:</b> vehicle color, upper/lower clothing color, confidence, position, speed, distance, direction, longitude and latitude, license plate information <sup>l</sup>
<b>Approvals</b>	
<b>Product markings</b>	CSA, UL/cUL, CE, RCM
<b>Supply chain</b>	TAA compliant
<b>EMC</b>	CISPR 24, CISPR 35, EN 55035, EN 55032 Class A, EN 50121-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2 Australia/New Zealand: RCM AS/NZS CISPR 32 Class A Canada: ICES-3(B)/NMB-3(B) USA: FCC Part 15 Subpart B Class B

<b>Safety</b>	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN/UL 62368-1 ed. 3, IEC/EN 62471 risk group 2
<b>Environment</b>	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78, IEC/EN 60529 IP66, IEC/EN 62262 IK10, NEMA 250 Type 4X, NEMA TS 2 (2.2.7-2.2.9), ISO 21207 (Method B)
<b>Wireless</b>	EN 305550, EN 301489-1, EN 301489-3, EN 62311, FCC Part 15 Subpart C
<b>Network</b>	NIST SP500-267
<b>Cybersecurity</b>	ETSI EN 303 645
<b>Cybersecurity</b>	
<b>Edge security</b>	<b>Software:</b> Signed OS, brute force delay protection, digest authentication and OAuth 2.0 RFC6749 OpenID Authorization Code Flow for centralized ADFS account management, password protection <b>Hardware:</b> Axis Edge Vault cybersecurity platform TPM 2.0 (CC EAL4+, FIPS 140-2 Level 2), secure element (CC EAL 6+), system-on-chip security (TEE), Axis device ID, secure keystore, signed video, secure boot, encrypted filesystem (AES-XTS-Plain64 256bit)
<b>Network security</b>	IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2) <sup>h</sup> , IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR, HTTPS/HSTS <sup>h</sup> , TLS v1.2/v1.3 <sup>h</sup> , Network Time Security (NTS), X.509 Certificate PKI, host-based firewall
<b>Documentation</b>	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to <a href="http://axis.com/support/cybersecurity/resources">axis.com/support/cybersecurity/resources</a> To read more about Axis cybersecurity support, go to <a href="http://axis.com/cybersecurity">axis.com/cybersecurity</a>
<b>General</b>	
<b>Casing</b>	IP66-, NEMA 4X- and IK10-rated Aluminum casing, weathershield (ASA) with black anti-glare coating Color: white NCS S 1002-B For repainting instructions, go to the product's support page. For information about the impact on warranty, go to <a href="http://axis.com/warranty-implication-when-repainting">axis.com/warranty-implication-when-repainting</a> . This product can be repainted.
<b>Power</b>	Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 Typical 10 W, max 25.5 W 10–28 V DC, typical 9.5 W, max 25.5 W
<b>Connectors</b>	<b>Network:</b> RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE <b>I/O:</b> Terminal block for two supervised and two unsupervised configurable inputs / digital outputs (12 V DC output, max load 50 mA) <b>Audio:</b> 3.5 mm mic/in line, 3.5 mm line out <b>Serial communication:</b> RS485/RS422, 2 pcs, 2 pos, full duplex, terminal block <b>Power:</b> DC input, terminal block
<b>IR illumination</b>	Optimized IR with power-efficient, long-life 850 nm IR LEDs Range of reach 50 m (164 ft) or more depending on the scene
<b>Storage</b>	Support for microSD/microSDHC/microSDXC card Support for SD card encryption (AES-XTS-Plain64 256bit) Recording to network-attached storage (NAS) For SD card and NAS recommendations see <a href="http://axis.com">axis.com</a>
<b>Operating conditions</b>	<b>Temperature:</b> -40 °C to 60 °C (-40 °F to 140 °F) <b>Start-up temperature:</b> -25 °C (-13 °F) <b>Maximum temperature according to NEMA TS 2 (2.2.7):</b> 74 °C (165 °F) <b>Humidity:</b> 10–100% RH (condensing) <b>Wind speed (sustained):</b> 60 m/s (134 mph) <sup>k</sup>
<b>Storage conditions</b>	<b>Temperature:</b> -40 °C to 65 °C (-40 °F to 149 °F) <b>Humidity:</b> 5–95% RH (non-condensing)
<b>Dimensions</b>	For the overall product dimensions, see the dimension drawing in this datasheet. Effective Projected Area (EPA): 0.063 m <sup>2</sup> (0.67 ft <sup>2</sup> )
<b>Weight</b>	5100 g (11.2 lb)
<b>Box content</b>	Camera, weathershield, AXIS TQ1003-E Wall Mount, installation guide, resistor <sup>®</sup> T20 tool, terminal block connectors, connector guard, cable gaskets, owner authentication key

<b>Optional accessories</b>	<p>AXIS T8415 Wireless Installation Tool          AXIS Surveillance Cards          AXIS Bird Control Spike          AXIS P13 Weathershield Extension A          For more accessories, go to <a href="https://axis.com/products/axis-q1686-dle#accessories">axis.com/products/axis-q1686-dle#accessories</a></p>
<b>System tools</b>	<p>AXIS Site Designer, AXIS Device Manager, product selector, accessory selector, lens calculator          Available at <a href="https://axis.com">axis.com</a></p>
<b>Languages</b>	<p>English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese</p>
<b>Warranty</b>	<p>5-year warranty, see <a href="https://axis.com/warranty">axis.com/warranty</a></p>
<b>Part numbers</b>	<p>Available at <a href="https://axis.com/products/axis-q1686-dle#part-numbers">axis.com/products/axis-q1686-dle#part-numbers</a></p>
<b>Sustainability</b>	
<b>Substance control</b>	<p>PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709          RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018          REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see <a href="https://echa.europa.eu">echa.europa.eu</a></p>
<b>Materials</b>	<p>Renewable carbon-based plastic content: 5% (biobased)          Screened for conflict minerals in accordance with OECD guidelines</p>

To read more about sustainability at Axis, go to [axis.com/about-axis/sustainability](https://axis.com/about-axis/sustainability)


<b>Environmental responsibility</b>	<p><a href="https://axis.com/environmental-responsibility">axis.com/environmental-responsibility</a>          Axis Communications is a signatory of the UN Global Compact, read more at <a href="https://unglobalcompact.org">unglobalcompact.org</a></p>
	<p>a. See the user manual at <a href="https://axis.com">axis.com</a> for more information about mounting height in relation to tilt angle, capture distance, and speed.          b. See the user manual at <a href="https://axis.com">axis.com</a> for more information about tilt angle in relation to mounting height, capture distance, and speed.          c. Measured at 5 m mounting height, with 25° tilt. See user manual at <a href="https://axis.com">axis.com</a> for more information.          d. Measured at 7 m mounting height, with 15° tilt. The mounting height, tilt and placement of the radar-video fusion camera affects the detection range. See the user manual at <a href="https://axis.com">axis.com</a> for more information.          e. Minimum distance between moving objects.          f. The radar coverage for road monitoring depends on factors like the mounting height of the device and speed of vehicles. For more information, see the user manual.          g. We recommend a maximum of 3 unique video streams per camera or channel, for optimized user experience, network bandwidth, and storage utilization. A unique video stream can be served to many video clients in the network using multicast or unicast transport method via built-in stream reuse functionality.          h. This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<a href="https://openssl.org">openssl.org</a>), and cryptographic software written by Eric Young (<a href="mailto:ey@cryptsoft.com">ey@cryptsoft.com</a>).          i. Available for download          j. Only available with AXIS License Plate Verifier          k. The values shown are based on results from actual wind tunnel testing. The maximum wind speed when the unit is stationary is not known due to wind speed limit of 60 m/s (135 mph) at the test lab. For drag force calculations, use Effective Projected Area (EPA).</p>

## Detect, Observe, Recognize, Identify (DORI)

	DORI definition	Distance (wide)	Distance (tele)
Detect	25 px/m (8 px/ft)	130.2 m (427.1 ft)	664.4 m (2179.2 ft)
Observe	63 px/m (19 px/ft)	51.6 m (169.2 ft)	263.6 m (864.6 ft)
Recognize	125 px/m (38 px/ft)	26 m (85.3 ft)	132.9 m (436 ft)
Identify	250 px/m (76 px/ft)	13 m (42.6 ft)	66.5 m (218.1 ft)

The DORI values are calculated using pixel densities for different use cases as recommended by the EN-62676-4 standard. The calculations use the center of the image as the reference point and consider lens distortion. The possibility to recognize or identify a person or object depends on factors such as object motion, video compression, lighting conditions, and camera focus. Use margins when planning. The pixel density varies across the image, and the calculated values can differ from the distances in the real world.

# Dimension drawing

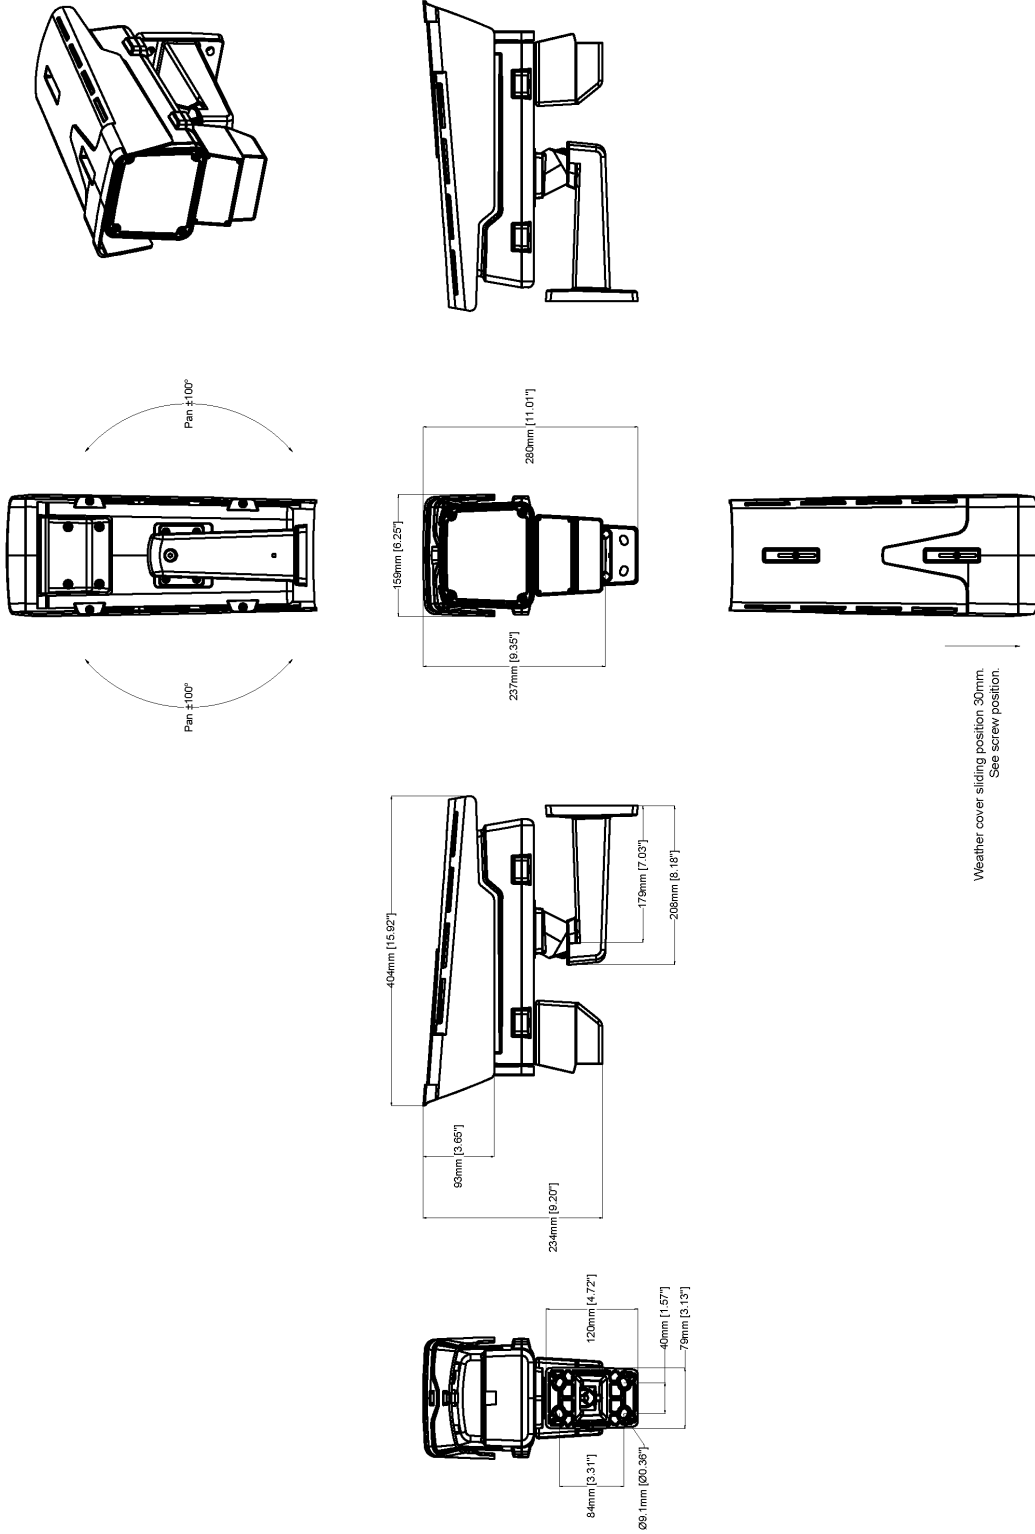

Revision	v.01	Revision date	2024-01-25
Paper size	A4	Release date	2024-01-25
Created by	MS	Scale	1:8

## AXIS® COMMUNICATIONS

### AXIS Q1686-DLE Radar-Video Fusion Camera

www.axis.com

© 2024 Axis Communications

## Highlighted capabilities

### Axis Edge Vault

Axis Edge Vault is the hardware-based cybersecurity platform that safeguards the Axis device. It forms the foundation that all secure operations depend on and offer features to protect the device's identity, safeguard its integrity and protect sensitive information from unauthorized access. For instance, **secure boot** ensures that a device can boot only with **signed OS**, which prevents physical supply chain tampering. With signed OS, the device is also able to validate new device software before accepting to install it. And the **secure keystore** is the critical building-block for protecting cryptographic information used for secure communication (IEEE 802.1X, HTTPS, Axis device ID, access control keys etc.) against malicious extraction in the event of a secu-

rity breach. The secure keystore and secure connections are provided through a Common Criteria or FIPS 140 certified hardware-based cryptographic computing module.

Furthermore, signed video ensures that video evidence can be verified as untampered. Each camera uses its unique video signing key, which is securely stored in the secure keystore, to add a signature into the video stream allowing video to be traced back to the Axis camera from where it originated.

To read more about Axis Edge Vault, go to [axis.com/solutions/edge-vault](https://axis.com/solutions/edge-vault).

For more information, see [axis.com/glossary](https://axis.com/glossary)