



SPA-S1000

IP Audio Server



Key Features

- System Expansion: Up to 512 speakers
- Supported Protocol: IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP
- TTS: English(US, UK), German, French, Spanish, Russian
- Ethernet: 100/1000 Base-T

SPA-S1000

IP Audio Server



Specifications

| | |
|---|--|
| Product | |
| Type | IP Audio Server |
| Network | |
| Ethernet | 10/100 Base-T |
| General | |
| Operating Temperature | -10 ~ +40°C (+14°F ~ +104°F) |
| Operating Humidity | 10~85% RH (Non-Condensing) |
| Weight | 3.02Kg |
| Size | 482(W) × 44(H) × 280(D)mm |
| Color | Black |
| Certificate | EMC : KS C 9832/9835, EN 55032/55035, FCC Part 15 Subpart B, ICES-003 Safety : KC 62368-1, EN 62368-1, UL 62368-1, CAN/CSA C22.2 No.2 62368-1 |
| Power | |
| PoE | AC 120-240V, 50/60Hz, 10W, DC 24V, 350mA |
| Network Protocol | |
| Security | Password protection : admin,setup,user,guest (sha-2, Digest authentication, User access log) Digest authentication, User access log |
| Supported Protocols | IPv4, HTTP, SIP, mDNS, DNS, NTP, TCP, UDP, DHCP, ARP, ICMP |
| System Integration | |
| API (Application Programming Interface) | SUNAPI |
| Multi-source Dynamic PA control | Multi-source up to 48 (Multicast) (Audio 24CH + Mic 24CH) Up to 512 Zone Control (Multicast) Up to 20 Zone Control (Unicast) Up to 255 Groups |
| Functional Monitoring | Connection verification, Built-in system logging |


SPA-S1000

IP Audio Server



CAD

Unit:mm [inch]

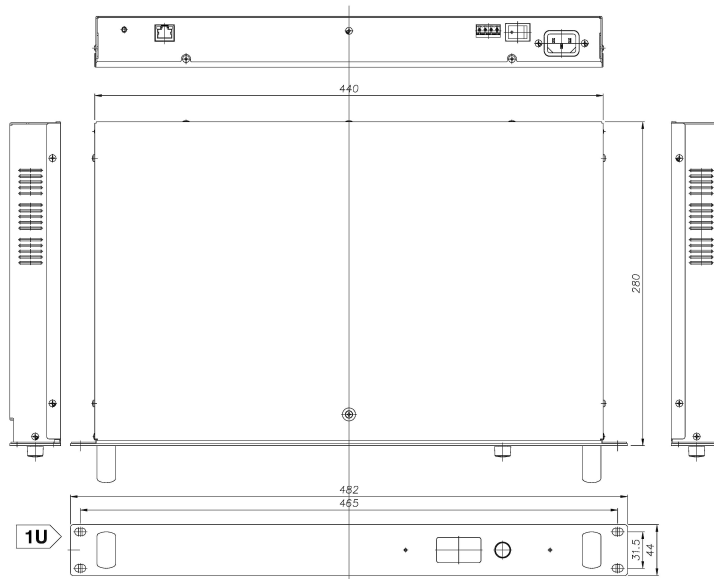

| | | |
|---------------|------------|----------------------------|
| 3 | MODEL2 | |
| 2 | MODEL1 | |
| 1 | SPA-S1000 | '22.7.15 |
| No. | MODEL NAME | DATE |
| Unit:mm[inch] | | SCALE:1/1 © Hanwha Techwin |

© Hanwha Techwin Co.,Ltd. All rights reserved.